

CASE *III*



THE CASE IH PTX600

The **Case IH PTX600** meets your tillage demands for soil penetration and accuracy. Its heavy-duty tubular frame construction is designed to handle tough tillage conditions and heavy residue with ease. The flexible frame and floating hitch design provides unmatched land following ability to cope with all types of terrain.

You can be sure the PTX600 provides consistent tillage depth. Easy-to-set single cylinder depth control and parallel lift – ensures accurate, uniform depth across the entire working width.


The Case IH PTX600 is not only designed and built to do the job right, it's built to keep on doing it year after year.

The durability and reliability you've come to expect from Case IH is an integral part of the PTX600. It's built to last!

The **PTX600 has a range of shank spacing and trip point load options** to match your soil conditions. Shanks are available in 9 inch (229 mm) or 12 inch (305 mm) spacing in a variety of cutting widths that accommodate from 27 to 81 ground-penetrating shanks. Couple the versatility of the shank spacing options with the variety of available ground-engaging tools and optional equipment, like a 3- or 4-bar harrow, to create your custom tillage solution. Your Case IH dealer will be happy to show you the different configurations available to help you maximize your productivity.

Arrange for a demonstration.

Ask your Case IH dealer to show you how the PTX600 maintains accurate tillage depth over a wide range of field conditions.

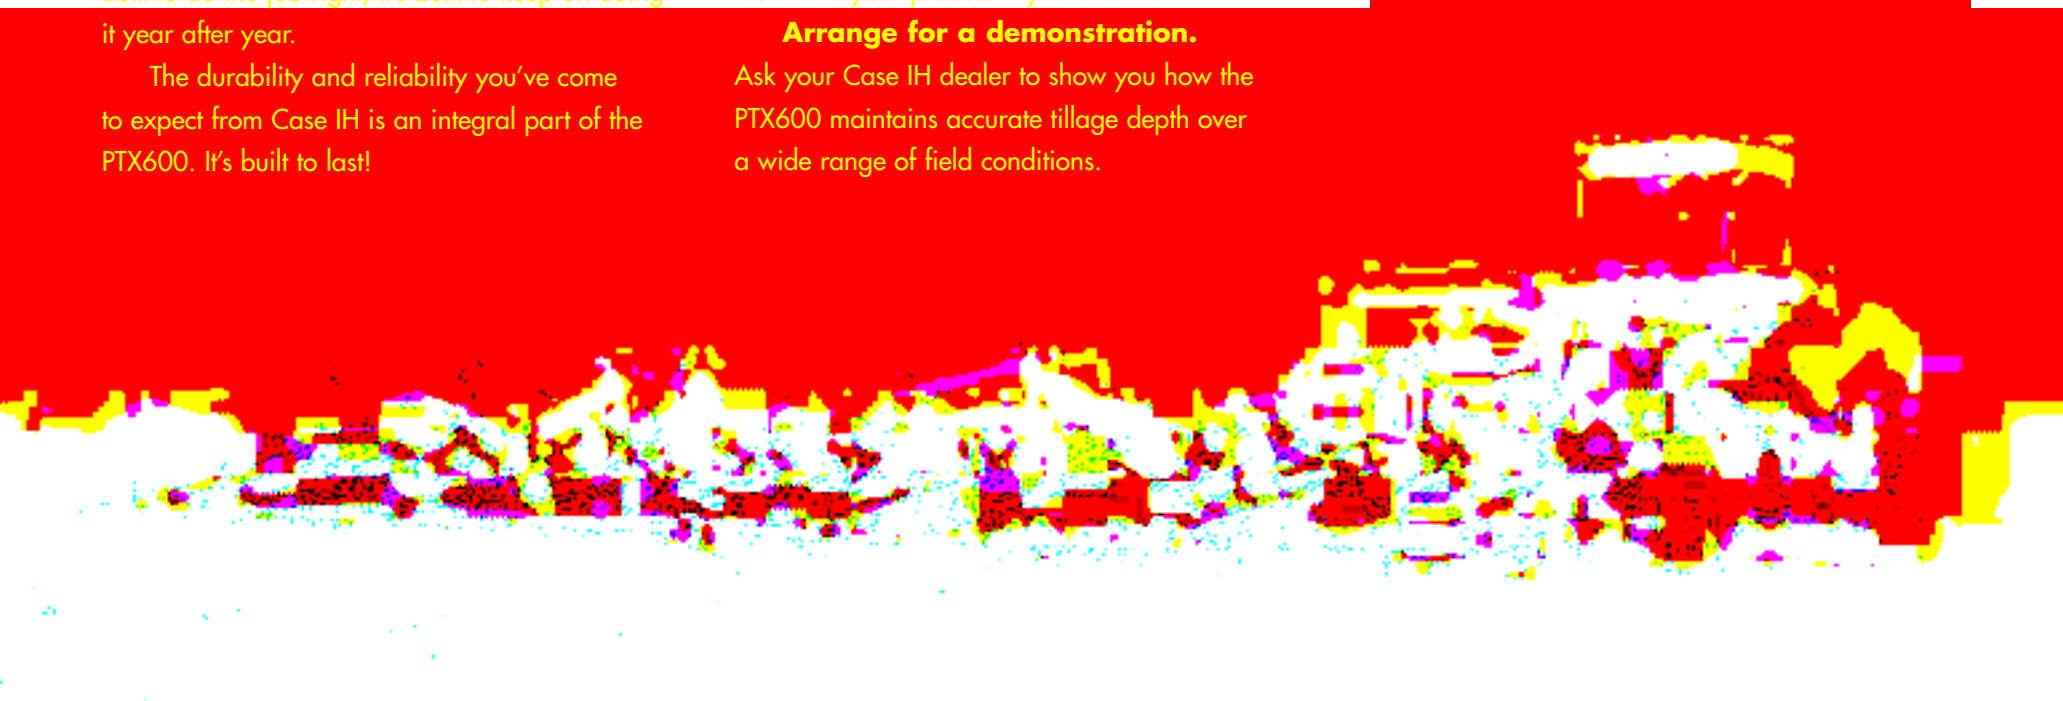

9 in. (229 mm) spacing*																		
Number of shanks	35	37	43	45	47	49	51	53	55	57	59	61	63	65	71	73	79	81
	3-Section Models										5-Section Models							
Working width – ft. in. (m)	26'3" (8.0)	27'9" (8.5)	32'3" (9.8)	33'9" (10.3)	35'3" (10.8)	36'9" (11.2)	38'3" (11.7)	39'9" (12.1)	41'3" (12.6)	42'9" (13.0)	44'3" (13.5)	45'9" (13.9)	47'3" (14.4)	48'9" (14.9)	53'3" (16.3)	54'9" (16.7)	59'3" (18.0)	60'9" (18.5)
Transport width – ft. in. (m)	18'8" (5.7)	18'8" (5.7)	18'6" (5.6)	18'6" (5.6)	21'8" (6.6)	21'8" (6.6)	18'8" (5.7)	18'8" (5.7)	21'8" (6.6)	21'8" (6.6)	18'8" (5.7)	18'8" (5.7)	21'8" (6.6)	21'8" (6.6)	21'8" (6.6)	21'8" (6.6)	21'8" (6.6)	21'8" (6.6)
Transport height – ft. in. (m)	12'6" (3.8)	12'6" (3.8)	15'2" (4.6)	15'2" (4.6)	15'2" (4.6)	15'2" (4.6)	17'11" (5.5)	17'11" (5.5)	17'11" (5.5)	17'11" (5.5)	13'10" (4.2)	13'10" (4.2)	13'10" (4.2)	13'10" (4.2)	16'10" (5.1)	16'10" (5.1)	16'10" (5.1)	16'10" (5.1)
Overall length – ft. in. (m)	25'4" (7.7)	25'4" (7.7)	25'4" (7.7)	25'4" (7.7)	26'2" (8.0)	26'2" (8.0)	25'4" (7.7)	25'4" (7.7)	26'2" (8.0)	26'2" (8.0)	26'2" (8.0)	24'4" (7.4)	26'2" (8.0)	26'2" (8.0)	26'2" (8.0)	26'2" (8.0)	26'2" (8.0)	26'2" (8.0)
Total weight – lbs. (kg)	11,648 (5283)	11,881 (5389)	12,913 (5857)	13,177 (5977)	13,567 (6154)	13,831 (6274)	14,782 (6705)	15,046 (6825)	15,478 (7021)	15,742 (7141)	18,351 (8324)	18,584 (8430)	19,096 (8662)	19,329 (8768)	20,874 (9468)	21,107 (9574)	22,222 (10 080)	22,486 (10 200)
Center frame width – ft. (m)	13' (3.96)	13' (3.96)	13' (3.96)	13' (3.96)	16' (4.88)	16' (4.88)	13' (3.96)	13' (3.96)	16' (4.88)	16' (4.88)	13' (3.96)	13' (3.96)	16' (4.88)	16' (4.88)	16' (4.88)	16' (4.88)	16' (4.88)	16' (4.88)
Inner wing width – ft. (m)	na	na	na	na	na	na	na	na	na	na	9' (2.74)	9' (2.74)	9' (2.74)	9' (2.74)	12' (3.66)	12' (3.66)	12' (3.66)	12' (3.66)
Outer wing width – ft. (m)	6' (1.83)	6' (1.83)	9' (2.74)	9' (2.74)	9' (2.74)	9' (2.74)	12' (3.66)	12' (3.66)	12' (3.66)	12' (3.66)	6' (1.83)	6' (1.83)	6' (1.83)	6' (1.83)	6' (1.83)	6' (1.83)	9' (2.74)	9' (2.74)

* Dimensions include 12 in. (305 mm) sweeps on 9 in. (229 mm) shank spacing. Weights based on 550 lb (160 kg) trips and do not include ground engaging tools or harrows.

12 in. (305 mm) spacing**																		
Number of shanks	27	29	33	35	36	38	39	41	42	44	45	47	48	50	54	56	60	62
	3-Section Models										5-Section Models							
Working width – ft. in. (m)	27'0" (8.2)	29'0" (8.8)	33'0" (10.1)	35'0" (10.7)	36'0" (10.9)	38'0" (11.6)	39'0" (11.9)	41'0" (12.5)	42'0" (12.8)	44'0" (13.4)	45'0" (13.7)	47'0" (14.3)	48'0" (14.6)	50'0" (15.2)	54'0" (16.5)	56'0" (17.1)	60'0" (18.3)	62'0" (18.9)
Transport width – ft. in. (m)	18'8" (5.7)	18'8" (5.7)	18'6" (5.6)	18'6" (5.6)	21'8" (6.6)	21'8" (6.6)	18'8" (5.7)	18'8" (5.7)	21'8" (6.6)	21'8" (6.6)	18'8" (5.7)	18'8" (5.7)	21'8" (6.6)	21'8" (6.6)	21'8" (6.6)	21'8" (6.6)	21'8" (6.6)	21'8" (6.6)
Transport height – ft. in. (m)	12'6" (3.8)	12'6" (3.8)	15'2" (4.6)	15'2" (4.6)	15'2" (4.6)	15'2" (4.6)	17'11" (5.5)	17'11" (5.5)	17'11" (5.5)	17'11" (5.5)	13'10" (4.2)	13'10" (4.2)	13'10" (4.2)	13'10" (4.2)	16'10" (5.1)	16'10" (5.1)	16'10" (5.1)	16'10" (5.1)
Overall length – ft. in. (m)	25'4" (7.7)	25'4" (7.7)	25'4" (7.7)	25'4" (7.7)	26'2" (8.0)	26'2" (8.0)	25'4" (7.7)	25'4" (7.7)	26'2" (8.0)	26'2" (8.0)	24'4" (7.4)	25'4" (7.7)	26'2" (8.0)	26'2" (8.0)	26'2" (8.0)	26'2" (8.0)	26'2" (8.0)	26'2" (8.0)
Total weight – lbs. (kg)	11,145 (5055)	11,417 (5179)	12,400 (5625)	12,686 (5754)	13,002 (5898)	13,288 (6027)	14,037 (6367)	14,323 (6497)	14,682 (6660)	14,967 (6789)	17,443 (7912)	17,715 (8035)	18,136 (8226)	18,408 (8350)	19,669 (8922)	19,941 (9045)	21,007 (9529)	21,293 (9658)
Center frame width – ft. (m)	13' (3.96)	13' (3.96)	13' (3.96)	13' (3.96)	16' (4.88)	16' (4.88)	13' (3.96)	13' (3.96)	16' (4.88)	16' (4.88)	13' (3.96)	13' (3.96)	16' (4.88)	16' (4.88)	16' (4.88)	16' (4.88)	16' (4.88)	16' (4.88)
Inner wing width – ft. (m)	na	na	na	na	na	na	na	na	na	na	9' (2.74)	9' (2.74)	9' (2.74)	9' (2.74)	12' (3.66)	12' (3.66)	12' (3.66)	12' (3.66)
Outer wing width – ft. (m)	6' (1.83)	6' (1.83)	9' (2.74)	9' (2.74)	9' (2.74)	9' (2.74)	12' (3.66)	12' (3.66)	12' (3.66)	12' (3.66)	6' (1.83)	6' (1.83)	6' (1.83)	6' (1.83)	6' (1.83)	6' (1.83)	9' (2.74)	9' (2.74)

** Dimensions include 16 in. (410 mm) sweeps on 12 in. (305 mm) shank spacing. Weights based on 650 lb (160 kg) trips and do not include ground engaging tools or harrows.



Tires and Options			
Trips and shanks	550 lb. (250 kg), 1 x 2 in. (25.4 x 50.8 mm) shanks, 2.25 in. (57.1 mm) centers fit 50°, 9 in. (229 mm) spacing		
	650 lb. (295 kg), 1.25 x 2 in. (31.7 x 50.8 mm) shanks, 2.25 in. (57.1 mm) centers fit 50°, 12 in. (305 mm) spacing		
Tires	3-section models: 12 tires 5-section models: 18 tires		
Center tires	9" (229 mm) spacing, 35-53 shank, 3-section models: 11L x 15 (D)		
	9" (229 mm) spacing, 55 & 57 shank, 3-section models: 11L x 15 (F)		
	9" (229 mm) spacing, 5-section models: 235/75R x 17.5 (H)		
	12" (305 mm) spacing, 27-38 shank, 3-section models: 11L x 15 (D)		
	12" (305 mm) spacing, 39 & 44 shank, 3-section models: 11L x 15 (F)		
Options	12" (305 mm) spacing, 5-section models: 235/75R x 17.5 (H)		
Options	Mudscrapers	Trip shim kits	Rear hitch for towing implements
	Air package	Mounted press wheels	Ground engaging tools
	Work switches	Mounted harrows	
	Endmarkers	Tine furrow closer	

Case Corporation reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions and illustrative material herein are as accurate as known at time of publication, but are subject to change without notice.

SEE YOUR LOCAL CASE IH DEALER

This literature has been published for worldwide circulation. Availability of some models and equipment builds varies according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your Case IH dealer/distributor will be able to give you details of the products and their specifications available in your area.

WORLDWIDE CASE IH CONTACT INFORMATION

UNITED STATES/CANADA: 700 STATE STREET RACINE, WI 53404 USA

LATIN AMERICA: AV. JUSCELINO KUBITSCHKE DE OLIVEIRA N. 11825 CAIXA POSTAL 14040 CEP 81503 CURITIBA, PARANA, BRAZIL

WESTERN AND CENTRAL EUROPE/CIS: CRANES FARM ROAD BASILDON ESSEX SS143AD ENGLAND

EASTERN EUROPE/AFRICA/ASIA: VIALE DELLE NAZIONI 55 41100 MODENA, ITALY

AUSTRALIA/NEW ZEALAND: 31-67 KURRAJONG ROAD ST. MARYS NEW SOUTH WALES 2760 AUSTRALIA



SAFETY NEVER HURTS!™ Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs, and use any safety features provided.

CASE IH